




# Canon PowerShot SD1000 LCD Screen Replacement

This is the removal of the LCD screen in order to clean or replace it.

Written By: Phillip Phung

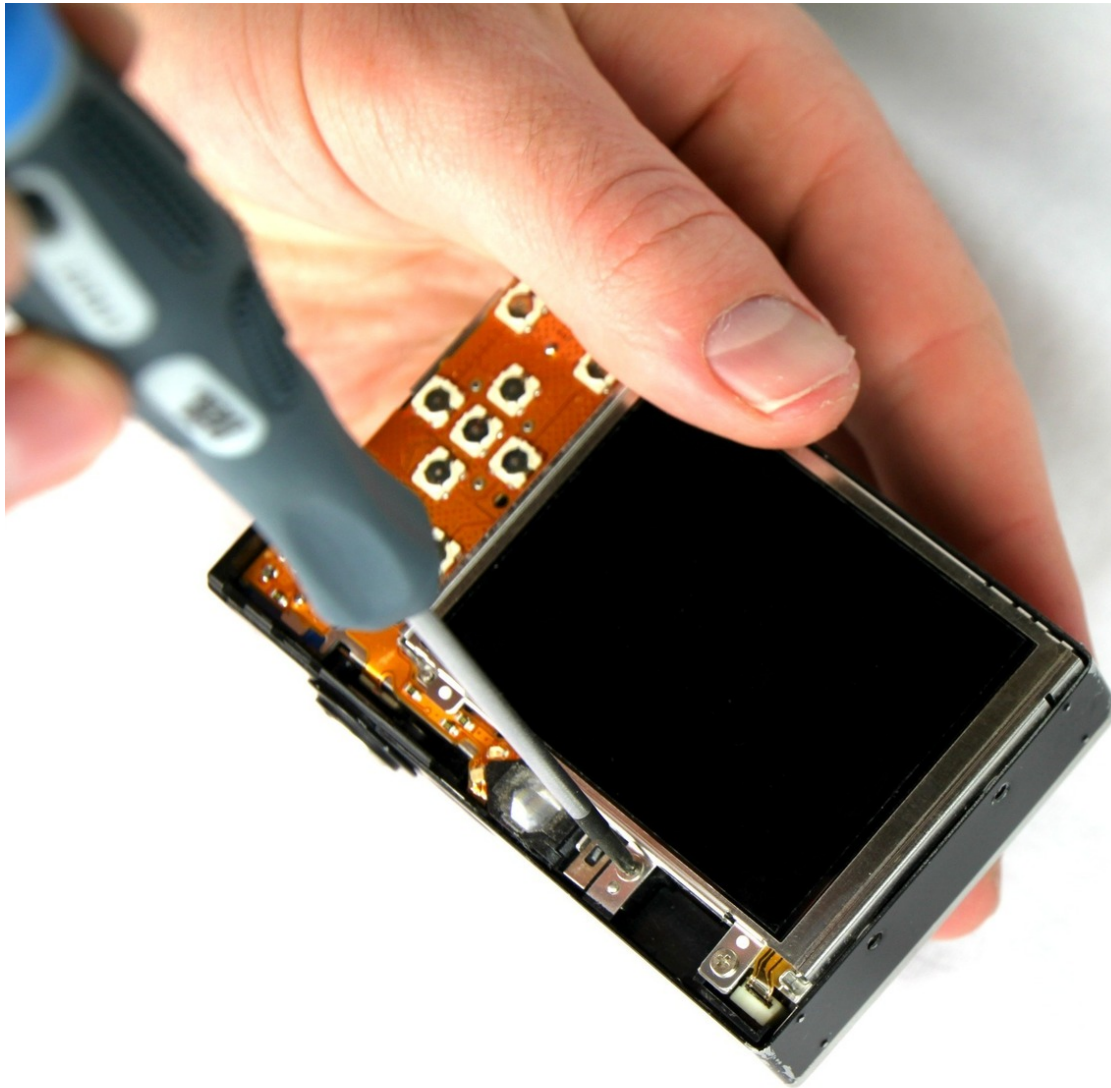




## TOOLS:

- [Phillips #00 Screwdriver](#) (1)
  - [Spudger](#) (1)
-

## Step 1 — Back Panel

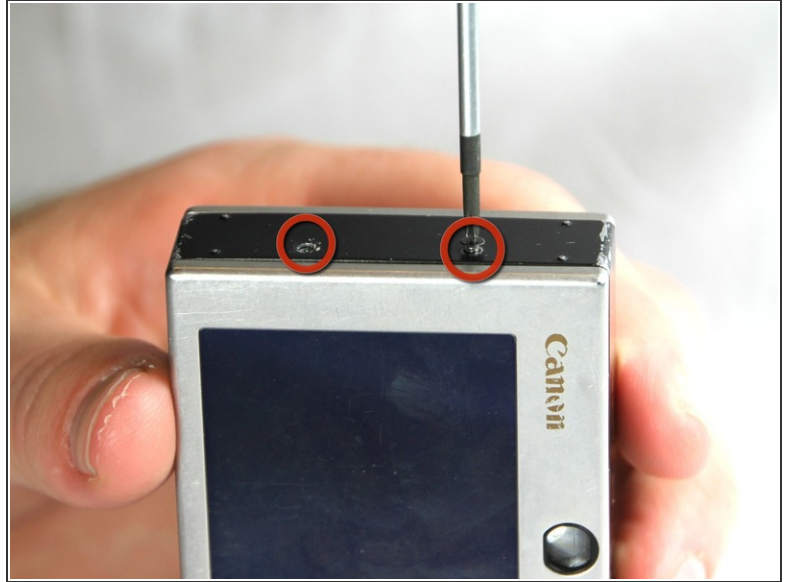

- Remove the two screws from the side panel closest to the camera lens.

ⓘ Note: These screws are 2.9 mm long.

## Step 2



- Remove the two screws from the camera bottom panel.

ⓘ Note: These screws are 2.9 mm long.


### Step 3



- Remove the 2 screws from the side panel farthest from the lens.

ⓘ Note: These screws are 2.9 mm long.


### Step 4

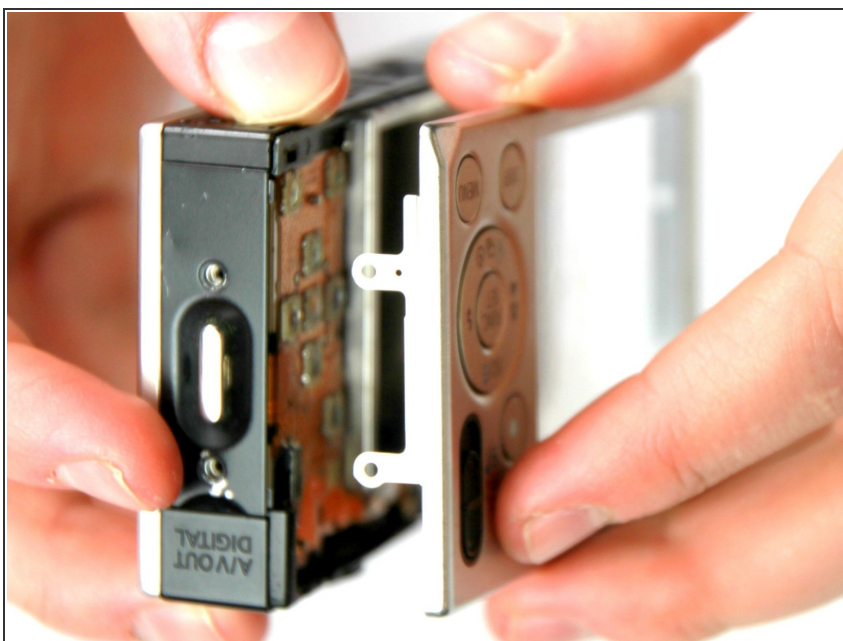

- Pull the back panel away from the camera body, starting at the end with the function buttons.




## Step 5

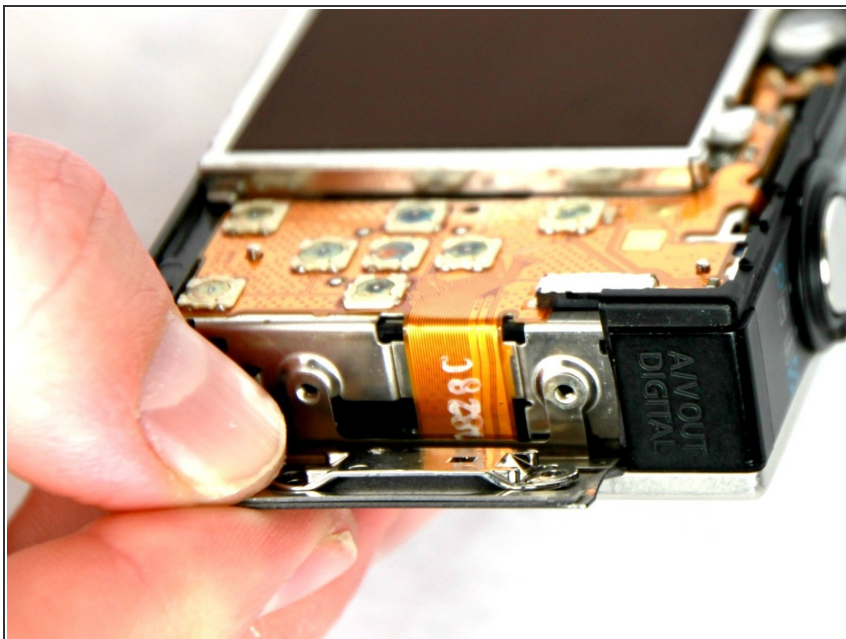

- Remove the small cover panel and attached wrist strap mount.

## Step 6 — Front Case of Camera

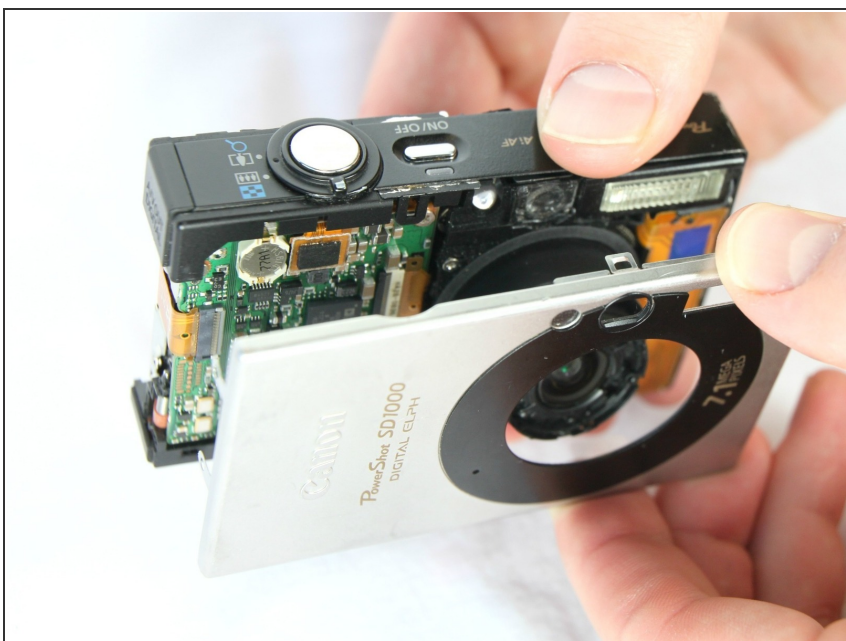


- Remove the front cover by gently pulling it away from the camera body.

## Step 7




- Place the front cover, back cover, and wrist strap mount in a safe place until you are ready for reassembly.

## Step 8 — LCD Screen

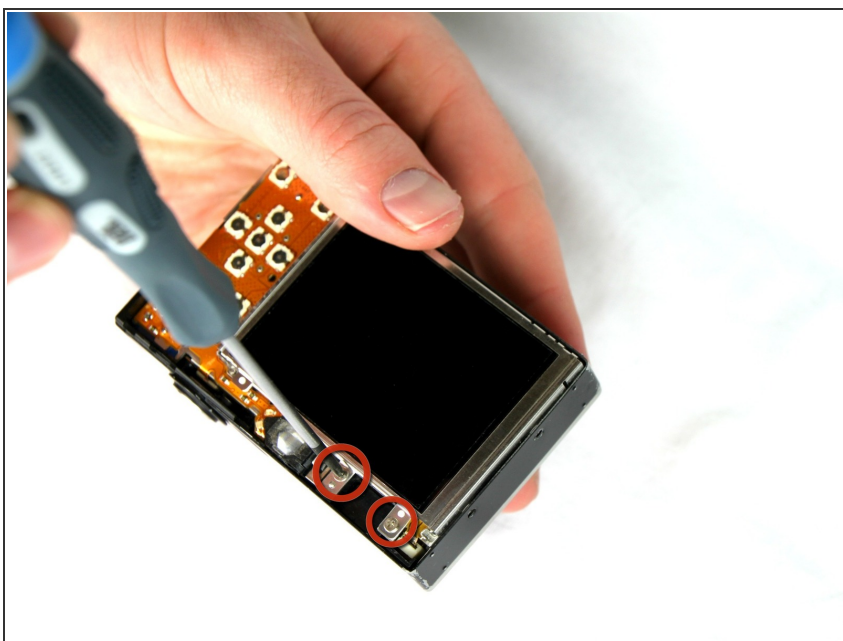


- Remove the 2 screws located at the top of the LCD panel.
- ⓘ Note: These screws are 2.4 mm long.

## Step 9

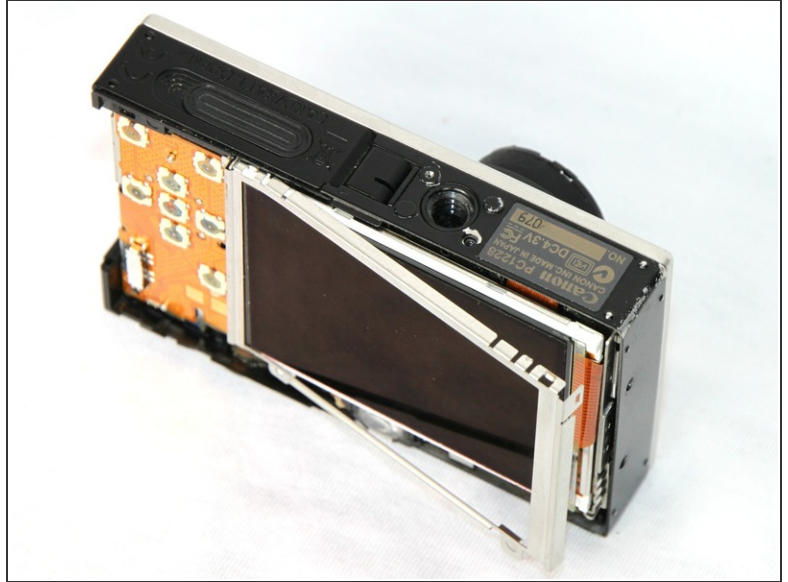

- Pull up the metal frame surrounding LCD screen starting at the side of the camera.


## Step 10

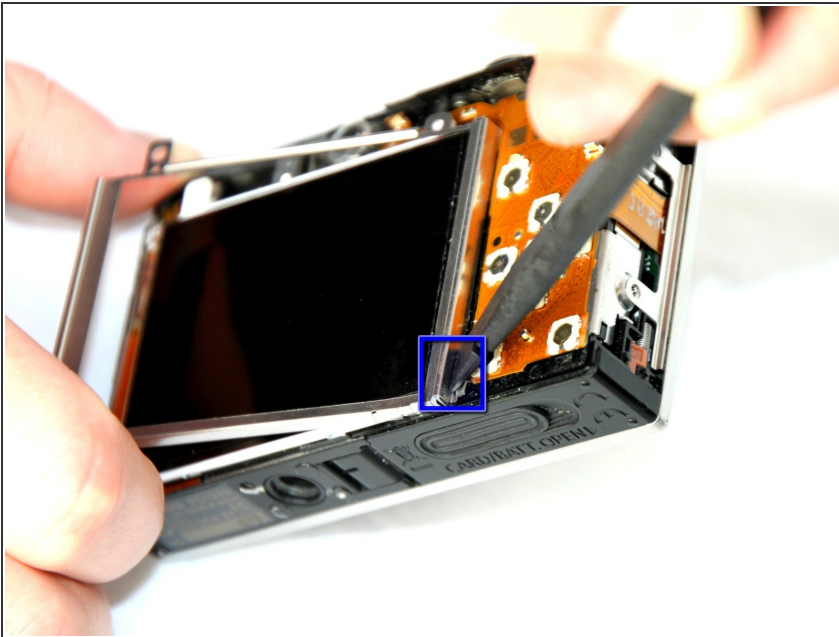


- Push the metal frame away from the metal tab using the spudger, to detach the frame.
- Rotate the metal frame upwards.
- ⓘ Note: The metal framing should be attached by a metal tab towards the bottom of the camera, near the function buttons.





## Step 11

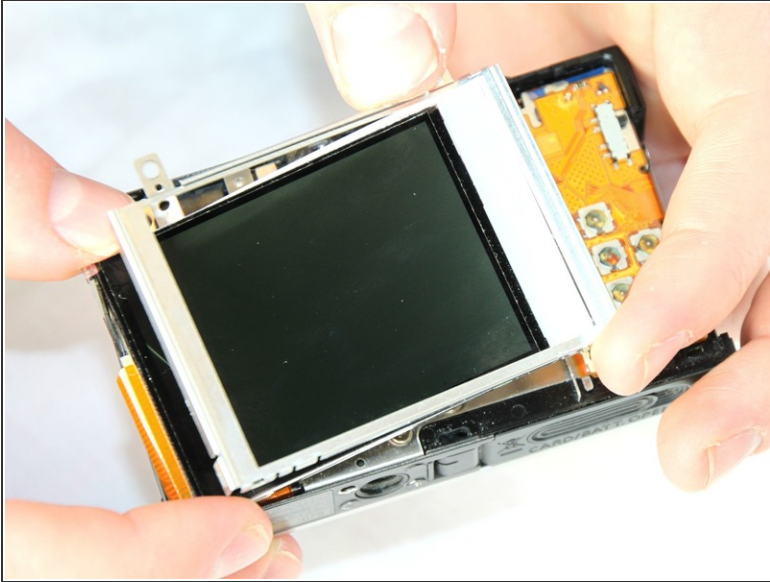

- Carefully lift the metal frame from the camera.
- Remove the black LCD screen, leaving the thin lens pieces in place.

 **Note:** BE CAREFUL, both components are attached by an orange connector ribbon and cannot be removed yet!

## Step 12

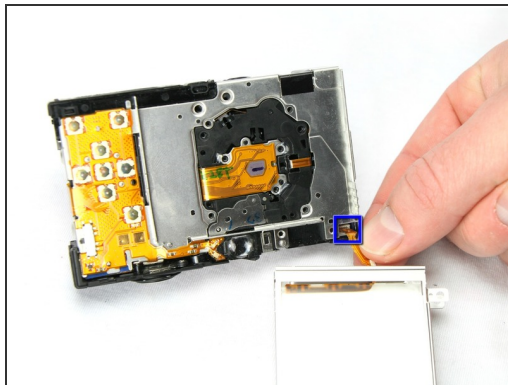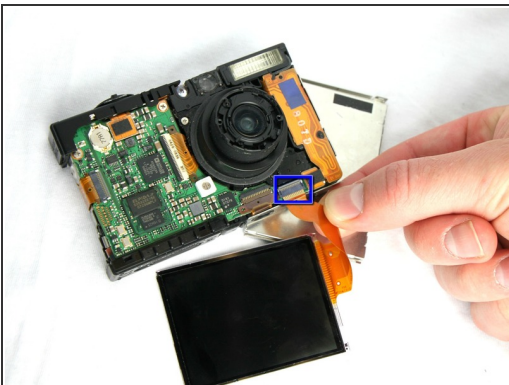

- Carefully pull on the orange connector ribbon to disconnect the LCD screen.
- The LCD screen can be pulled out of the frame before disconnecting its connector ribbon.

 **Note:** Tweezers are helpful to disconnect the ribbon



To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-29 01:24:18 AM.